



CE

MINI PONY F 3000°K

Cod. 9812035205

Handy spotlight with small dimensions, with 50W LED source, fresnel lens, manual regulation of zoom, complete with color frame.

ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

OPTICAL DATA

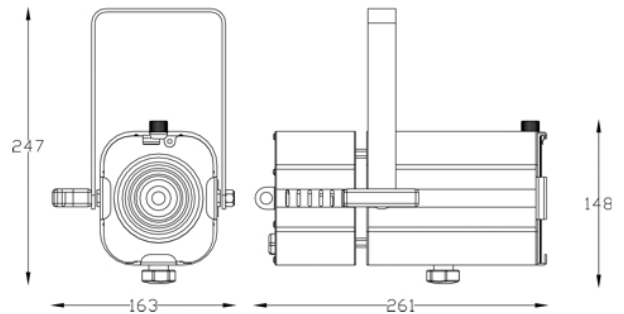
Number and type of LEDs	1 COB BRIDGELUX
Color temperature	3000 °K
CRI min.	90
Optics	13° - 88°

MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	1.7 Kg
Cooling system	AUTOMATIC FAN ASSISTED WITH VARIABLE SPEED
Max noise level	0 - 16 db
Body	EXTRUDED ALUMINIUM AND STEEL SHEET
IP protection rate	IP20

FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-
Stand-alone function	-
Control signal	-

**PHOTOMETRIC DATA at minimum zoom - allo zoom minimo**

13° For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	4658	2070	1164	745	518	380	291	230
Diam. m	0,5	0,8	1,0	1,3	1,5	1,8	2,0	2,3

22° For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	4658	2070	1164	745	518	380	291	230
Diam. m	0,8	1,2	1,6	2,0	2,4	2,8	3,3	3,7

PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

68° For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	711	316	178	114	79	58	44	35
Diam. m	2,5	3,7	4,9	6,2	7,4	8,7	9,9	11,1

88° For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	711	316	178	114	79	58	44	35
Diam. m	3,3	5,0	6,6	8,3	9,9	11,6	13,2	14,9